

GP725 Resin Enhanced Wax

High Performance Wax Thermal Transfer Ribbon



Food/Beverage



Health/Beauty



Logistics



Retail



The printhead cleaner *built in* your ribbon.

Benefits

- Easy to use, no printer adjustments
- Dark images with solid fill and no show-through
- Prints on a wide range of tag and label stocks
- High speed printing for high efficiency
- Sharp text and lines for highly readable barcodes
- Resin-enhanced provides good scratch and smudge resistance
- Anti-static formula and unique backcoat protects the printhead
- Clean Start® built-in printhead cleaner maintains print quality

Recommended Stocks

Paper

- Vellum
- Matte Coated
- Semi-Gloss
- Gloss
- Floodcoats

Synthetics

- PP / Polypropylene
- PE / Polyethylene
- Polyolefin (e.g. Tyvek)

Applications

- Autotag
- Compliance labeling
- Component identification
- Hang tags
- Ingredient lists
- Prepared foods
- Prime label
- Product identification
- Shipping
- Warehousing
- Work in Process (WIP)

Key Product Range

| STANDARD WAX | ENHANCED WAX | WAX RESIN | RESIN | NEAR EDGE |
|--------------|-----------------------------|------------------------------|-------------------------|----------------------------------|
| SW200 | GP725 High Mark DC100 | PM308 Prime Mark DC200 | SP330 SP575 DC400 | NETMark IQ NETFlex+ NET330 |

Technical Specifications

| | |
|------------------------------|--------------------|
| Color Code Tab | Clear |
| Film Thickness | 4.5 Microns |
| Total Ribbon Thickness | 8.6 Microns |
| Transmission Density | 2.70 MacBeth Scale |
| Ink Melting Point | 65°C / 149°F |

Imaging Characteristics

| | |
|-----------------------|-----------------------|
| Printer | Flathead |
| Max Print Speed | 14 IPS (355 mm/s) |
| Image Darkness | 1.9 RD (densitometer) |

Compliance

- REACH – SVHC Free
- RoHS/WEEE
- California Proposition 65
- Additional Regulatory Requirements Upon Request


Sample SKUs

Part # CES11075 – 110 mm x 50 m – CSI
Part # CES11074 – 110 mm x 50 m – CSO

Storage Conditions

12 months recommended
20-85% Relative Humidity Rate, 23-104°F (-5-40°C)

Performance Ratings

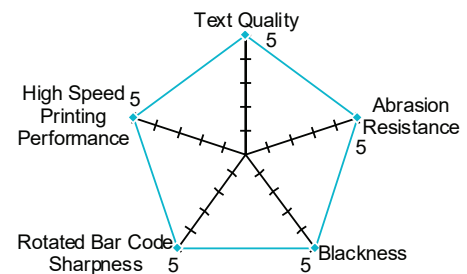

310 Commerce Drive • Amherst, NY 14228
Toll-Free: 888.464.4625 • Phone: 716.691.6333
salesinfo@iimak.com • www.iimak.com